
SMR TILT

TILT AT THE PERFECT ANGLE

MORE INFO

THE SMR TILT SYSTEM ADVANTAGE

- IDEAL FOR LIGHT ROOF STRUCTURES OR OLDER BUILDING APPLICATIONS.
- NO SEISMIC OR SKID ISSUES.
- LOW WEIGHT PER SQUARE FOOT.
- VARIOUS TILT ANGLES FOR MAXIMUM FLEXIBILITY.

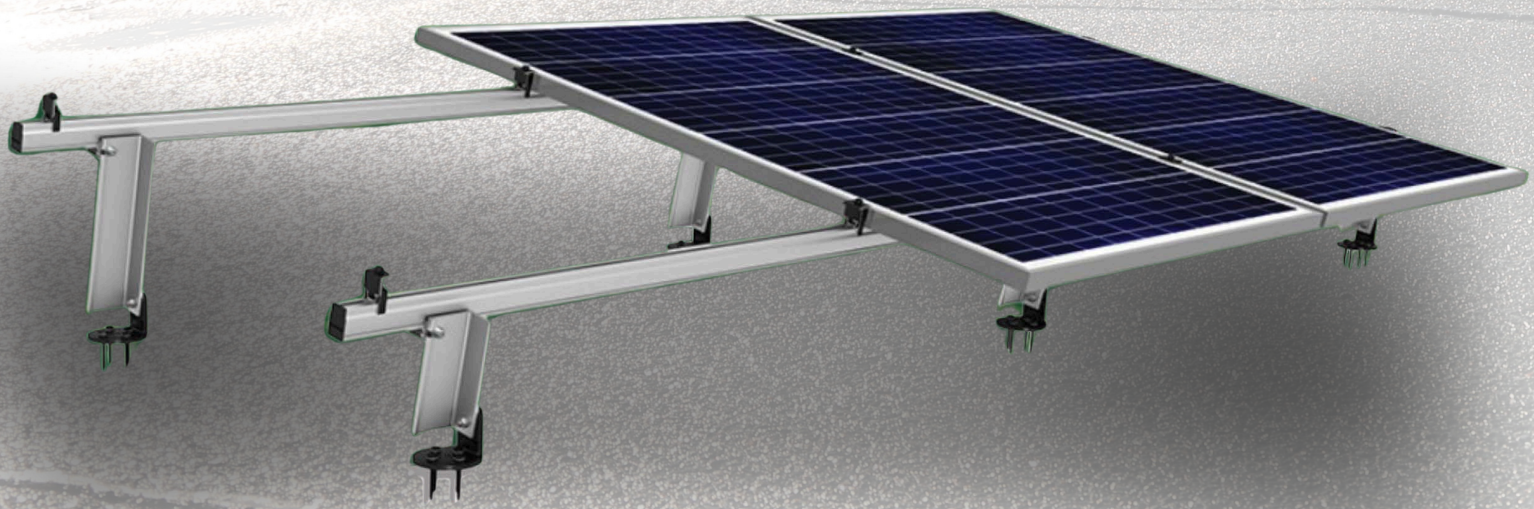

KEY FEATURES OF THE SMR TILT SYSTEM

We offer three standard tilt rail lengths—8, 14, and 25 inches—to achieve tilt angles of 10 and 20 degrees. A 10-foot, full-length tilt rail is also available for on-site cutting, providing maximum flexibility. With a variety of attachment options, the system can be configured in countless ways to meet your specific needs.





TECHNICAL DATA

APPLICATION	Flat and low-slope roof
MATERIAL	High-grade aluminum and 304 stainless steel hardware
FINISH	Clear anodized
MODULE ORIENTATION	Portrait
TILT ANGLE	10 and 20 Degrees; 10-foot tilt rail available for on-site cutting to fit any desired angle
STRUCTURAL INTEGRITY	IBC compliant
WARRANTY	25 years